



**NOVA  
INDUSTRIAL  
SERVICES LTD.**

**NOVA ALIGATOR PREMIUM FREEZER DOOR**

**VERTICAL FAST ACTION DOOR FOR DEEP-FREEZE FACILITIES**

---

**FAST - SAFE - ECONOMICAL**



**NOVA  
INDUSTRIAL  
SERVICES LTD.**

## **NOVA ALIGATOR PREMIUM FREEZER DOOR**

**VERTICAL FAST ACTION DOOR FOR DEEP-FREEZE FACILITIES**



### **INTRODUCTION**

The Nova Aligator (energy-saving door) is the first fast-action door in the world that combines the positive features of well-known sliding and rapid-action doors in a single product. The Nova Aligator can be mounted on both the warm and the deep-freeze side and has an emergency opening. Heated via the waste heat of the drive, it also features an integrated energy-efficient electric heating system.

The Nova Aligator revolutionizes the term "door" because the product has been conceptually developed from the ground up to meet the needs of deep-freeze applications. All door systems previously used in this segment were unable to meet the requirements because of thermal bridges. Even the use of additional heaters was not able to completely solve this problem.


The Nova Aligator differs conceptually here. The entire construction, which consists of ISO sandwich panels, was designed to prevent thermal bridges. This concept not only protects the mechanical and electrical system of the door but also allows it to be used in deep-freeze areas with temperatures as low as  $-30^{\circ}\text{C}$ .

### **SAFETY**

The Nova Aligator has two safety systems as standard. The closing edge safety device functions via an 8.2 k $\Omega$  safety contact strip, which is integrated into the scuff board (in accordance with ASR 1.7). The Aligator also has four safety light barriers to minimize the risk of collisions and enable contactless reversing of the fast-action door.

### **ANTI-CRASH SYSTEM**


In the event of a collision with the door leaf or the scuff board, the scuff board jumps out of the guide rail with the door leaf. These can be pushed back into the guide quickly and easily by hand. The door will then continue to operate normally with the next opening impulse.

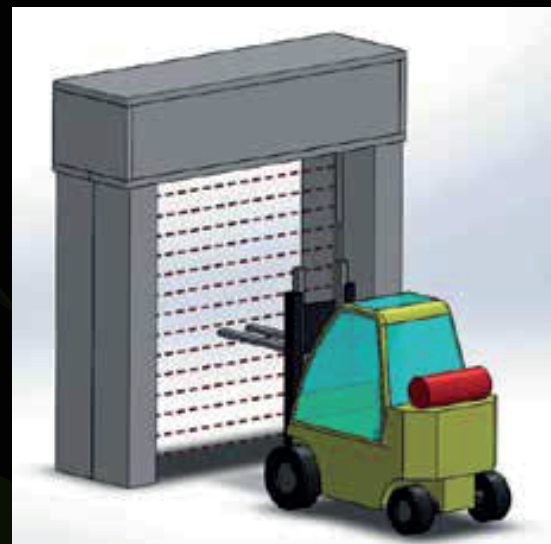

**01529 572 274**

**SALES@NOVA-IND.CO.UK**

**WWW.NOVA-IND.CO.UK**

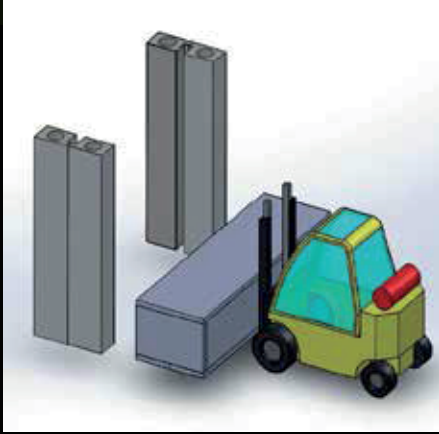

## HIGH OPERATING SPEED

With an opening speed of up to 2.5 m/s and a closing speed of 1.5 m/s, the Nova Aligator accelerates your work processes like no other deep-freeze door. Waiting times are minimized, and energy loss is reduced.

## MOUNTING SIDE, COLD/WARM


The Nova Aligator is one of the few deep-freeze doors that can be mounted and reliably operated on both the warm and cold sides (from temperatures as low as  $-30^{\circ}\text{C}$ ).

## DESIGN

The Nova Aligator is a modular construction consisting of three parts: one head part and two side parts. The entire door construction of the Aligator is made of sandwich panels and is completely self-supporting. This design makes installation completely independent of the wall conditions on-site.

## ELECTRICAL EQUIPMENT

The control system used is a 230 V frequency converter control, which enables a wide range of combinations with the most diverse command devices from many manufacturers. The entire wiring system is located inside the door, ensuring that no electrical wiring is exposed to sub-zero temperatures and that the electrical wiring is not visible from the outside.

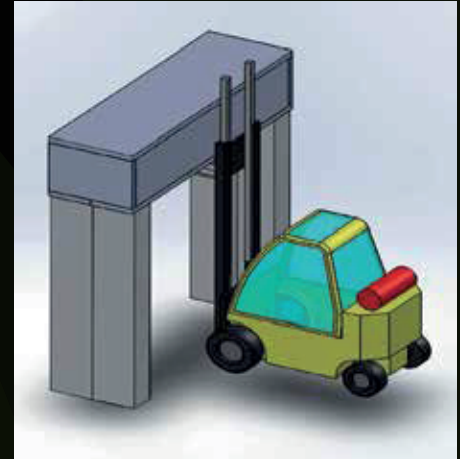

The electronic control of the Nova Aligator

## EMERGENCY OPENING

Thanks to the integrated weight compensation of the door leaf, the door leaf can be opened via the innovative emergency operation device in an emergency situation.


## INSULATION

The door leaf consists of a total of four different insulation layers. Each consists of two outer curtains (tear-resistant PES fabric in the color RAL 7016) and two insulation curtains, specially developed for use in the Aligator. This construction forms three additional layers of air that contribute to insulation.



The combination of insulation and air layers results in a very high insulation value with a heat transfer coefficient of  $0.31 \text{ W/m}^2\text{K}$  with a door leaf thickness of only 80 mm.



## SPACE REQUIREMENT

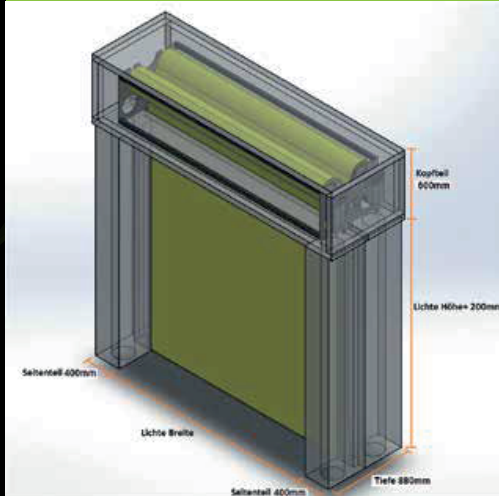

## OVERVIEW OF HEATING

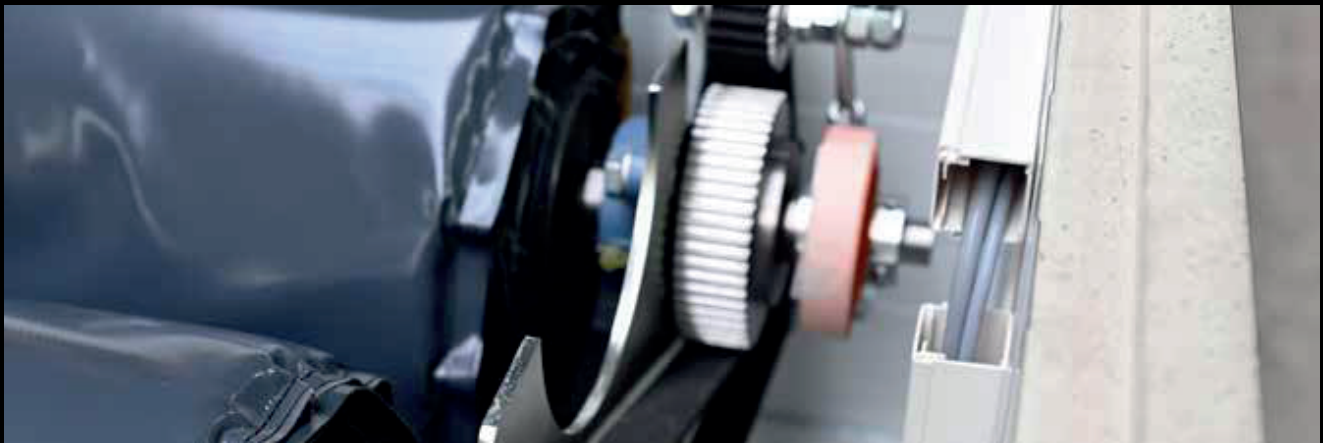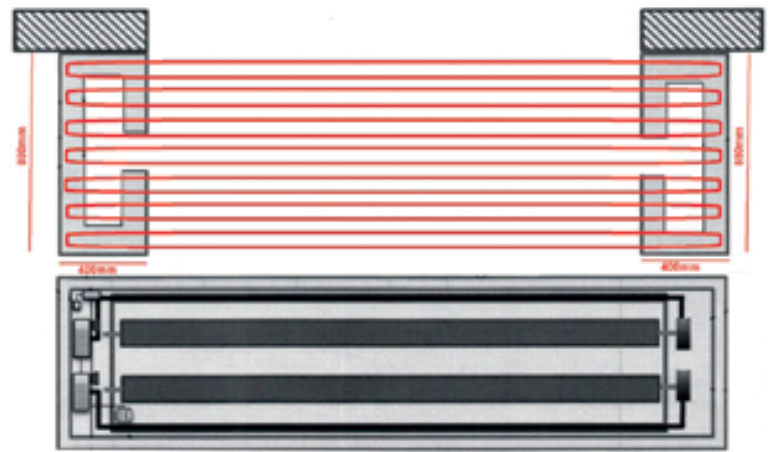

## TECHNICAL DATA SHEET

- Opening speed up to 2.5m/s (adjustable)
- Closing speed up to 1.5 m/s
- Drive 1.5 KW
- System value (Uf) 0.68 W/m<sup>2</sup>/K
- Safety: Safety strip, safety light barrier
- Modular construction with only three components
- 230 V frequency converter control
- Space requirement for lintel area: For door heights up to 4500 mm = 800 mm. From door height of 4501 mm = 900 mm.
- Space requirement for drive side = 400 mm
- Space requirement bearing side = 400 mm

*\*All technical information without guarantee. Subject to change.*



**FOR MORE INFORMATION**

**01529 572 274**

**SALES@NOVA-IND.CO.UK**

**WWW.NOVA-IND.CO.UK**

Find us on 