


Nova Fold Fast Action Folding Door

Low maintenance requirements

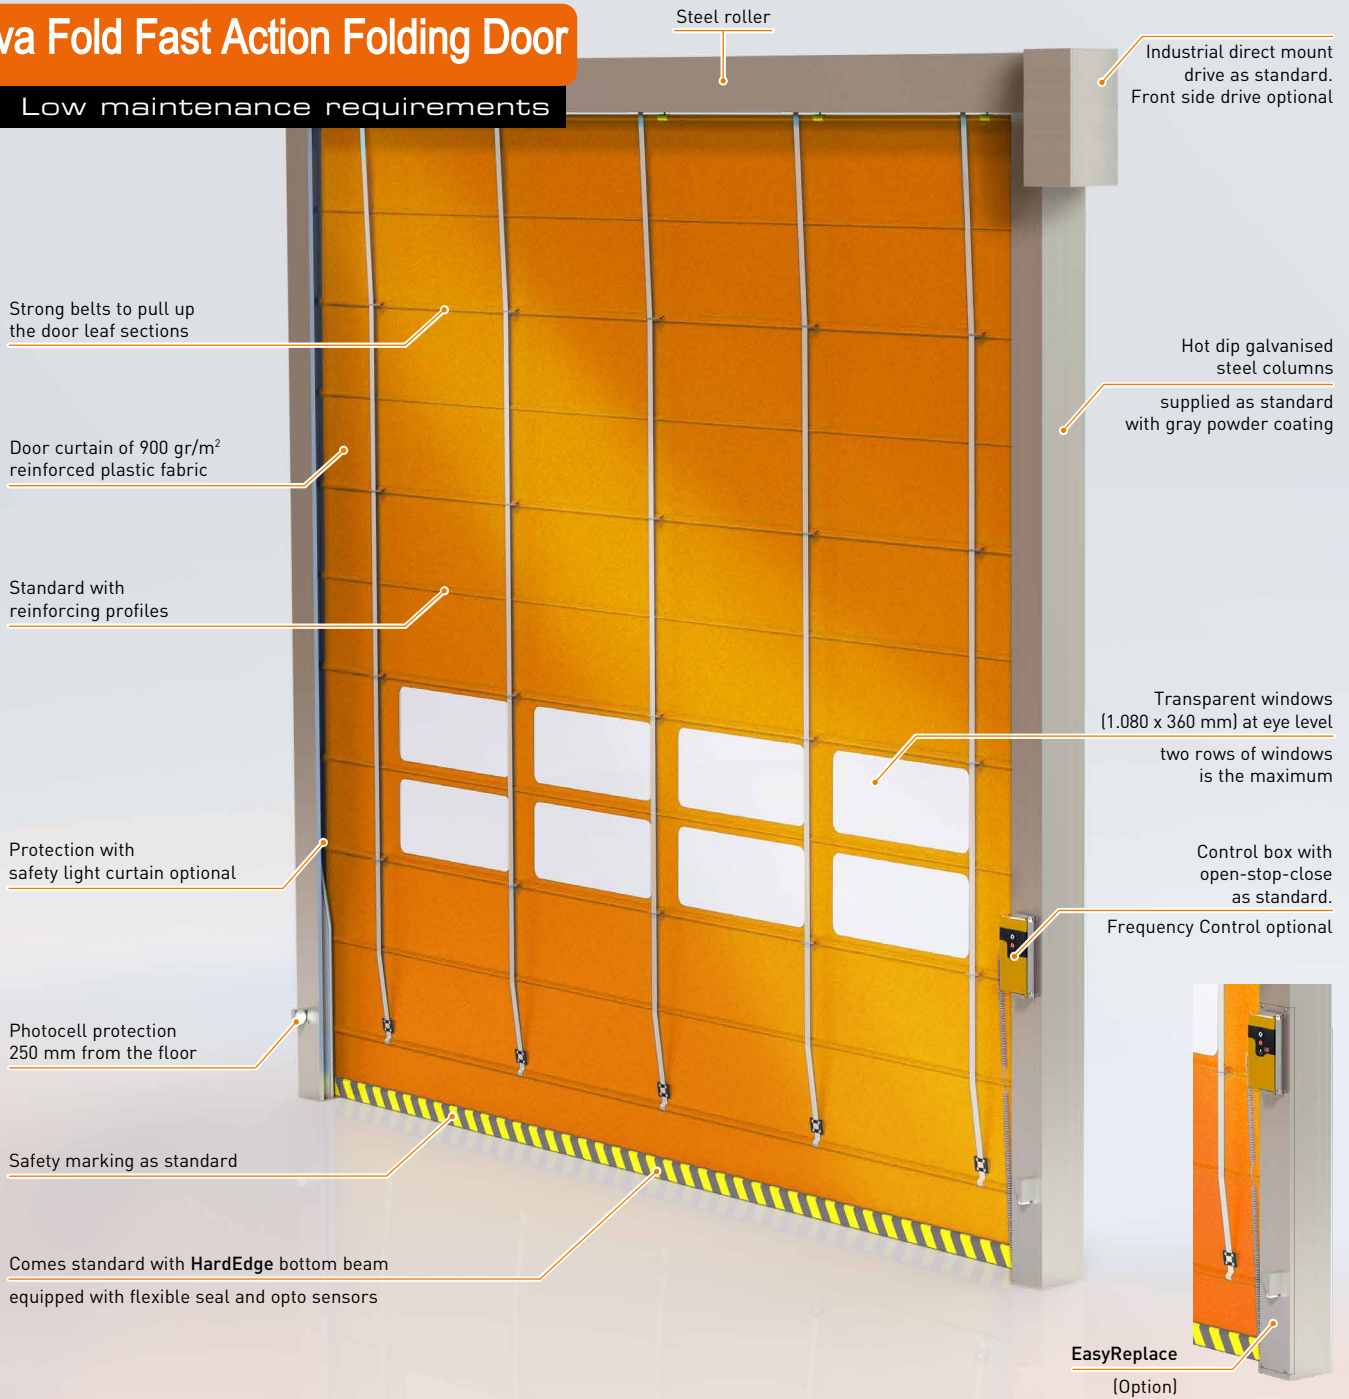

Combines a long lifespan with very low maintenance requirements

Properties

- max. surface area (WxH) = 36 m², max. width (W) = 6,000 mm, max. height (H) = 6,000 mm
- wind load resistance minimal class 3 according to EN 12424, or up to 13 Beaufort max. (118 -149 km/h) higher class 5 wind load resistance on request
- opening speed with Frequency Control max. 1.1 m/s*, closing speed approx. 0.5 m/s
- 900 gr/m², Class M2 door curtain in white 9016, yellow 1003, orange 2004, red 3002, blue 5005/5002, green 6026, gray 7038 and black 9005
- supplied as standard with powder coated columns, optionally with a built-in safety light curtain
- developed as a very maintenance-free exterior door for doorways with a high wind load
- EN13241 compliant



NOVA
INDUSTRIAL
SERVICES LTD.

The Nova Fold is a reliable folding door for the outer facade. Proven technology guarantees years of trouble-free operation. All components are well-engineered and very robust, in order to realize a long lifespan at very low maintenance costs. The Nova Fold offers many advantages in a logistic workflow. The efficient operation and high stability guarantee optimal energy saving, draught exclusion and climate control.

Dimensions		
max. width		6,000 mm
max. height		6,000 mm
max. surface area		36 m ²
max. wind force	Min. Cl. 3	Max. Cl. 5 ¹ /118-149km/h
required lateral space at the guides		220 mm
required lateral space at slip on drive		520 mm
required lateral space at non-drive side		220 mm
required lateral space at drive for fitting		650 mm
required space above		1,070 mm

Components and construction

The Nova Fold is an electrically driven folding door without balance springs. The door curtain consists of horizontal sections made of extremely durable polyester-reinforced PVC with reinforcement pro-files and heavy duty belts. These belts pull the curtain into a compact package above the door opening. The door curtain can be equipped with various types of window- or insect netting sections. The bottom of the door curtain has a solid HardEdge bottom beam with a flexible bottom seal. Steel columns ensure smooth lateral guidance of the door curtain. The steel columns are mounted to the steel top cover to form one sturdy unit, onto which the roller and drive are mounted.

Materials

The door columns are made of hot dip galvanised steel. The horizontal roller is made of steel. The HardEdge bottom beam is made of alu-minium and has a flexible bottom seal with opto-sensors. The door curtain is 900 gr/m², class 2 PVC with a polyester reinforcement inlay.

Colour

The door curtain is available in 9 standard colours. The columns are supplied as standard with a gray powdercoat in RAL 7011. All other RAL-colours are optionally available.

Drive

The drive consists of an electric motor with reduction unit, mounted at the side or at the front of the door. The roller is directly driven. Drive side available left or right (standard).

Technical details electric motor

- mains voltage without frequency control 3N~400V/50Hz/16A
- mains voltage with frequency control LNPE~230V/50Hz/16AT
- degree of protection IP65
- consumed power max. 4 kW

Protection

- the door can be manually opened in the case of a power loss
- supplied as standard with Photocell and Opto-sensors

Performance	
control box without frequency control (standard):	
max. opening speed	0.9 m/s
max. closing speed	0.9 m/s
control box with frequency control (up to 5,000 x 5,000 mm):	
max. opening speed	1.1 m/s*
max. closing speed	0.5 m/s

Structural provisions and connection

- a flat mounting frame and the necessary mounting space must be available
- exact installation dimensions in the Technical Datasheet
- within a radius of 500 mm of where the control unit without frequencycontrol will be positioned there must be a wall socket:
 - CEE-form red, 3N~400V/50Hz/16A
- within a radius of 500 mm of where the control unit with frequencycontrol will be positioned there must be a wall socket:
 - CEE-form blue 1 x 230V or CEE-form red 3N~400V, fused, slow operation 16 A, fitted with a circuit-breaker of at least 300 mA
- the control box usually is fitted on the drive side, at a height of approx. 1,500 mm from the floor
- with standard CEE-plug, the control box is IP54 compliant

Control and operation

The control unit has 3 buttons (open-stop-close) and a CEE plug, and regulates a multitude of functions such as:

- adjustable open time or 'Dead man control'
- LED display for control of the various functions
- permanently open or permanently shut
- service and run mode

Depending on the size and application of the door you can choose between two types of control:

- GFA TS971
 - GFA TS981
- Additional controls that can be connected to the control box are:
- push-button, pull switch, key-operated switch, photocell, radar, induction loop detection or radio control. Other forms of operation on request



Available controls:

TS971, TS981

Extras ¹⁾

Control and operation

- frequency control (up to 5,000 x 5,000 mm maximum)
- additional controls as described above
- control box directly wired (control box IP65)
- main switch directly wired on the control box (IP65)
- door interlock control in combination with another door

Protection

- safety light curtain up to a height of 2,500 mm
- Condor motion / presence sensor on the other side of the door as additional passage protection (TS981 control required)
- Falcon radar motion detector as additional passage protection (TS 981 control required)
- connection of traffic lights (red/green or red and green)
- warning light (orange or red)

Construction

- EasyReplace columns: these make replacing the entire door curtain even easier and faster
- Nova fold up to 7,000 x 6,800 mm W x H available on request
- windows (1,080 x 360 mm) made of transparent plastic
- metal hood and top cover in customer-specified RAL colour

* Depending on the configuration ¹ subject to surcharge



For more information:

Nova Industrial Services Ltd

T: 01529 572274

E: Sales@nova-ind.co.uk

W: www.nova-ind.co.uk